




GMDM-I


Multi jet super-dry pre-equipped
for remote reading modules

The GMDM-I is a multi-jet, dry dial magnetic transmission water meter with a 360° rotating lid.

Inductive pre-equipment for the installation of data communication modules come standard; M-Bus Wired and Wireless OMS, and non-magnetic pulse output. LoRa and NB-IoT are available upon request.



M-Bus
mod. IWM-TX3



M-Bus
mod. IWM-MB3



mod. IWM-PL3



TECHNICAL FEATURES

R=100H ↑

R=160H ↑

Size	DN	mm (in)	15 (1/2")	20 (3/4")	25 (1")	32 (1 1/4")	40 (1 1/2")	50 (2")
Overload flow rate	Q ₄	m ³ /h	3.125	6	7.875	12.5	20	31.25
Permanent flow rate	Q ₃	m ³ /h	2.5	4	6.3	10	16	25
Transitional flow rate	Q ₂	l/h	40	64	100.8	160	256	400
Min flow rate	Q ₁	l/h	25	40	63	100	160	250
Transitional flow rate	Q ₂	l/h	25	40	63	100	160	250
Min flow rate	Q ₁	l/h	15.63	25	39.38	62.5	100	156.25
Sensitivity		l/h	6	6	10	10	20	20
Min reading		l	0.05	0.05	0.05	0.05	0.05	0.05
Max reading		m ³	99,999					
Max admissible pressure MAP		bar	16	16	16	16	16	16

DIMENSIONS & WEIGHTS

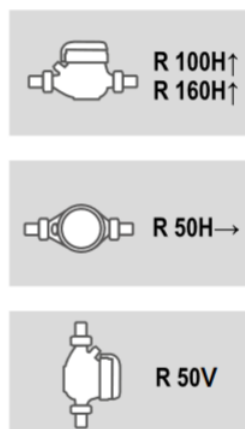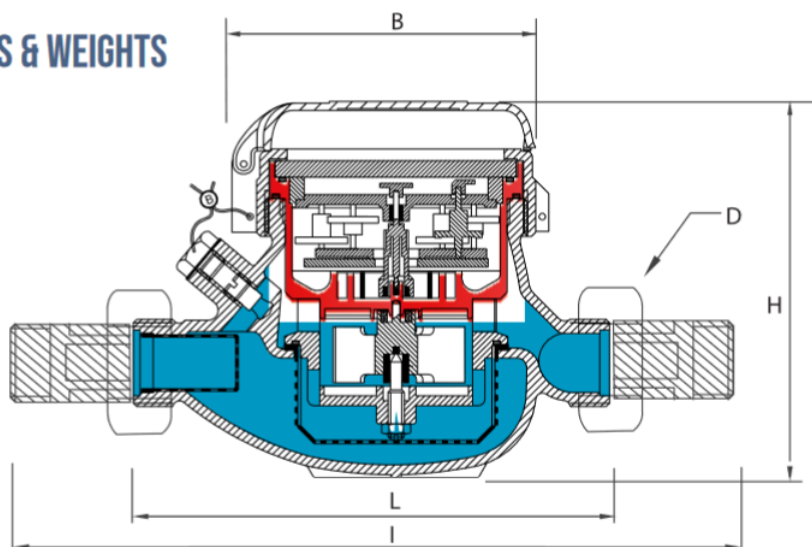

Size	mm (in)	15 (1/2")	20 (3/4")	25 (1")	32 (1 1/4")	40 (1 1/2")	50 (2")
L	mm	145- 165- 190	190	260	260	300	300
I	mm	225- 245- 270	290	360	380	440	460
H	mm	109	111	117	117	153	172
B	mm	100	100	104	104	126	160
D*	in	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"
Weight	Kg	1.18 1.41	1.4	2.09	2.18	4.38	4.46 9.40

